

S2B-S3B

Power, simplified




Singlephase wet and dry industrial vacuums, much more than essential

Essential, powerful, efficient.

Models S2B and S3B are the starting point to get the maximum advantages and the undisputed benefits that include, among others, the obvious and immediate savings of time and resources.

2 single-phase models (2 or 3 kW), respectively with two or three independent motors, the S2B and S3B industrial vacuums can collect solids and liquids. In particular they are designed to be used in mechanical manufacturing production sites to extract metal chips, metal filings, oil and lubricant solutions.

S2B and S3B, much more than essential.

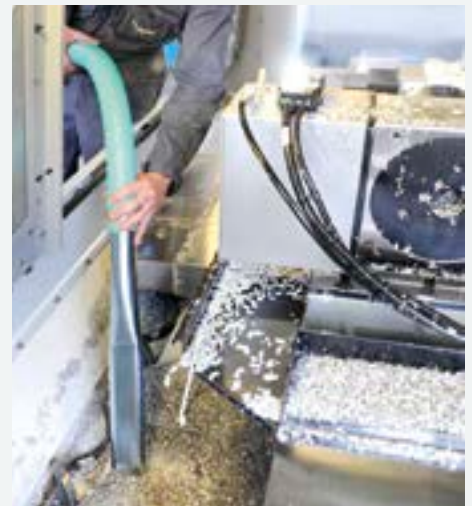

Optional HEPA filter

Technical specifications

| Description | Unit | S2B | S3B |
|-------------------------|-----------------|---------------|-------------------|
| Voltage | V | 230 | 230 |
| Frequency | Hz | 50-60 | 50-60 |
| Protection class | IP | 43 | 43 |
| Insulation class | Class | I | I |
| Rated power | kW | 2 | 3 |
| Airflow without hose | L/min | 5.500 | 8.100 |
| Vacuum max | kPa | 21 | 21 |
| Sound pressure level | dB(A) | 74 | 75 |
| Container capacity | L | 50 | 50-100 |
| Main filter area | cm ² | 19.500 | 19.500 |
| Inlet | mm | 70 | 70 |
| Length x Width x Height | cm | 79,5x60x127,5 | 79,5x60x127,5-157 |
| Weight | kg | 64 | 67-70 |

Nilfisk S.p.A.

Via Porrettana, 1991 - 41059 Zocca, (Modena)
Tel. +39 059 9730000 - Fax +39 059 9730065
industrial-vacuum@nilfisk.com
www.nilfisk.com

شريف صنعت پارسا



Nilfisk