


T22 - T40 - T40W - T75

Tailored for metal production



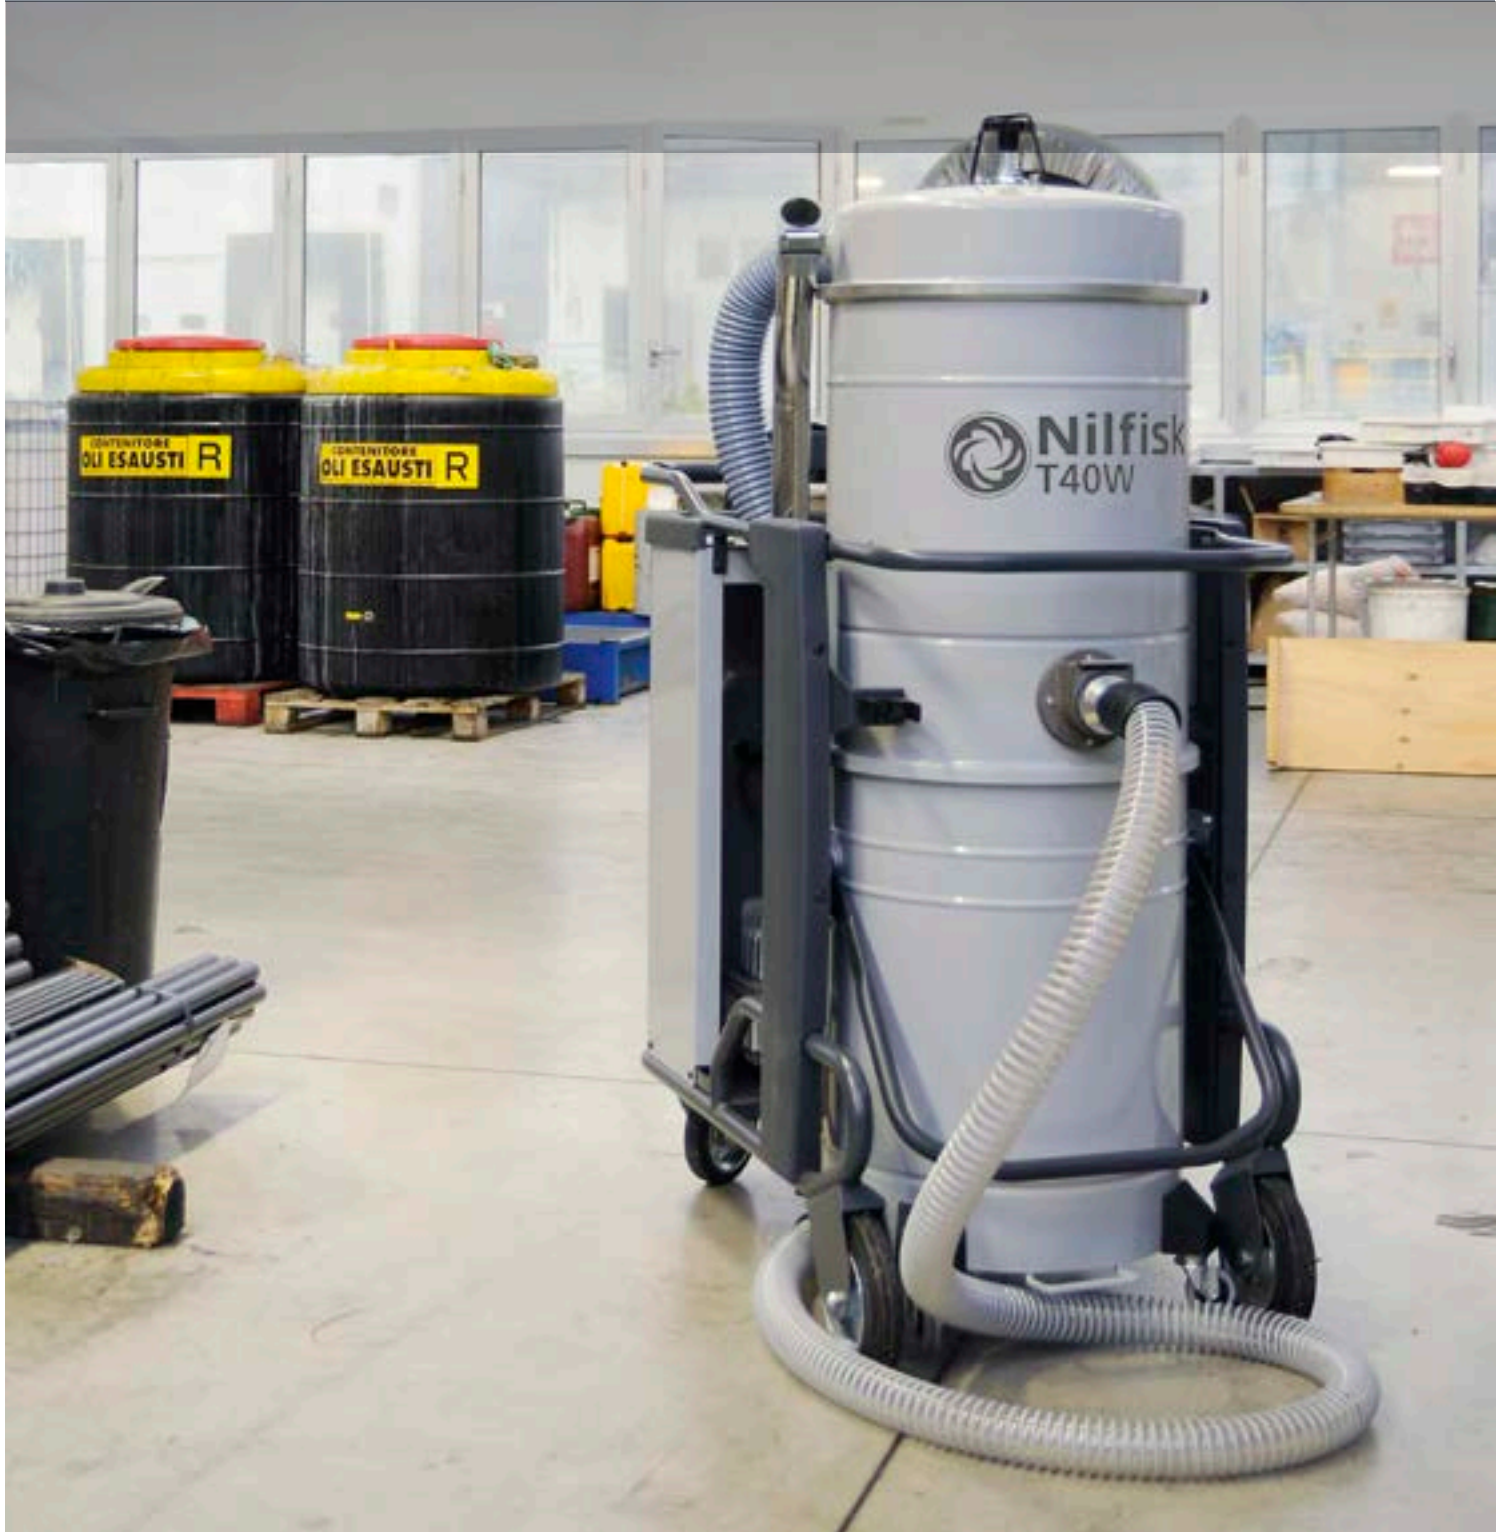

Recovery of oil and shavings



General cleaning



Recovery of oil



Strong and reliable

The "T" series. A new era in industrial vacuums

Strong, powerful, essential

The new threephase industrial vacuums T22, T40, T40W and T75 for wet and dry materials set a new standard in the heavy industry vacuum cleaning.

This new range is equipped with motors from 2,2 up to 7,5 kW, allowing users to choose the most suitable model for the different needs. In particular the 4 kW model is available with double stage side-channel blower connected in series for a greater vacuum (model T40) or connected in parallel for an highest airflow (T40W).

Metalworking, ceramics, food and chemical industries can now rely on industrial vacuums, designed according to their production requirements, for the cleaning and maintenance of the plants. The new vacuums are strong, powerful, essential and designed to work firstly with people and then with processing machines.

Give a shape to your needs

Models T22, T40, T40W and T75 have been designed following the requests of production companies:

- a large filter area for the collection of very fine dust (class "L" and "M" filters)
- HEPA H14 absolute filter to assure an healthier working environment
- big wheels, 2 castors with brakes and an ergonomic handle to easily move the vacuum
- Longopac® to collect the material in an "endless" bag (version GU FM)
- manual filter shaker and manometer to check filter efficiency
- reliable side-channel blower, needing no maintenance.

Choosing Nilfisk means choosing quality, the widest accessories range, the warranty of an international brand and 30 years of experience with manufacturing companies.



Plus



HEPA absolute filter on model T40W



Liquid cut-off on model T40



Longopac®



Manual filter shaker



Manometer



Accessories box

Technical specifications

| Description | Unit | T22 | T40 | T40W | T75 |
|-------------------------|-----------------|----------------|----------------|----------------|------------|
| Voltage | V | 400 | 400 | 400 | 400 |
| Frequency | Hz | 50 | 50 | 50 | 50 |
| Protection class | IP | 55 | 55 | 55 | 55 |
| Insulation class | Class | I | I | I | F |
| Rated power | kW | 2,2 | 4,3 | 4 | 7,5 |
| Airflow without hose | L/min | 5250 | 5250 | 8150 | 8900 |
| Vacuum max | kPa | 30 | 46 | 30 | 35 |
| Sound pressure level | dB(A) | 68 | 72 | 72 | 74 |
| Container capacity | L | 50-100 | 50-100 | 50-100 | 100 |
| Main filter area | cm ² | 19500 | 19500 | 19500 | 35000 |
| Inlet | mm | 70 | 70 | 70 | 70 |
| Length x Width x Height | cm | 113x60x124-153 | 113x60x124-153 | 113x60x124-153 | 130x60x164 |
| Weight | kg | 111-114 | 132-135 | 136-139 | 188 |

Nilfisk S.p.A.

Via Porrettana, 1991 - 41059 Zocca, (Modena) - Italy

Tel. +39 059 9730000 - Fax +39 059 9730065

industrial-vacuum@nilfisk.com

www.nilfisk.com

شريف صنعت پارسا



 Nilfisk